





Bale clamp with side shift, type HBC

Benefits

- Suitable for handling bales of paper, plastic or other material in e.g. manufacturing and recycling industries
- Clamps with side shift
- Clamping between jaws
- With fixed jaws
- The strong and robust constructions ensures low maintenance costs
- Can be delivered as a hook-on attachment or as an integrated attachment



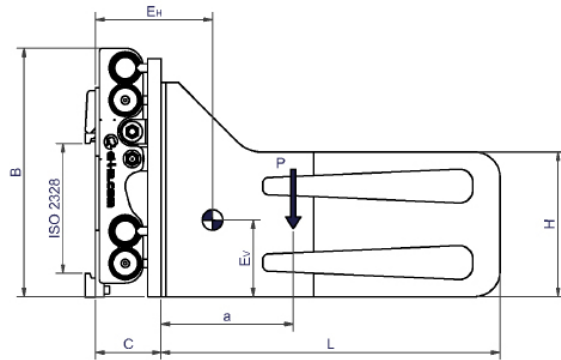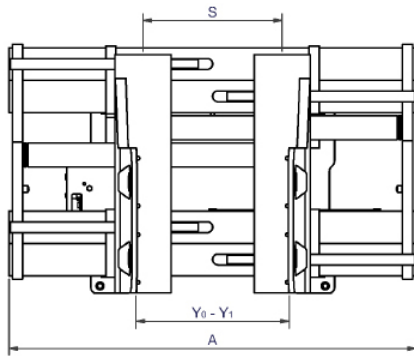

	Capacity	Clamping force (140 bar)	Load center	Width	Height	Load center	Center of gravity, horizontal	Center of gravity, vertical	Weight	Opening range	Side shift	Height x length	ISO 2328
	P [kg]	F [N]	a [mm]	A [mm]	B [mm]	C [mm]	E _H [mm]	E _V [mm]	Q [kg]	Y ₀ - Y ₁ [mm]	S [mm]	H x L [mm]	
HBC 25 1050	1800	29600	500	1050	730	194	254	334	494	485-1565	+/- 270	425x1000	2/3
HBC 25 1100	1800	29600	500	1100	730	194	253	335	498	485-1615	+/- 283	425x1000	2/3
HBC 25 1400	1800	29600	500	1400	730	194	246	337	520	485-1915	+/- 358	425x1000	2/3
HBC 35 1200	2500	36200	500	1200	820	225	239	387	695	525-1755	+/- 308	450x1000	3
HBC 35 1300	2500	36200	500	1300	820	225	237	387	707	525-1855	+/- 333	450x1000	3
HBC 35 1500	2500	36200	500	1500	820	225	232	389	732	525-2055	+/- 383	450x1000	3
HBC 50 1400	3500	36200	600	1400	820	225	282	383	764	525-1955	+/- 358	500x1200	3/4
HBC 50 1600	3500	36200	600	1600	820	225	277	385	789	525-2155	+/- 408	500x1200	3/4

Max. working pressure 140 [bar]

