


Gabelklammer mit integr. Seitenschub, Typ HK

Vorteile

- Klammer und integr. Seitenschub in einem Aggregat
- Stabiles Gleitsystem in austauschbare Buchsen
- Robuste Konstruktion sichert eine lange Lebensdauer
- Aufhängung Kl. 2, 3 oder 4, ISO 2328

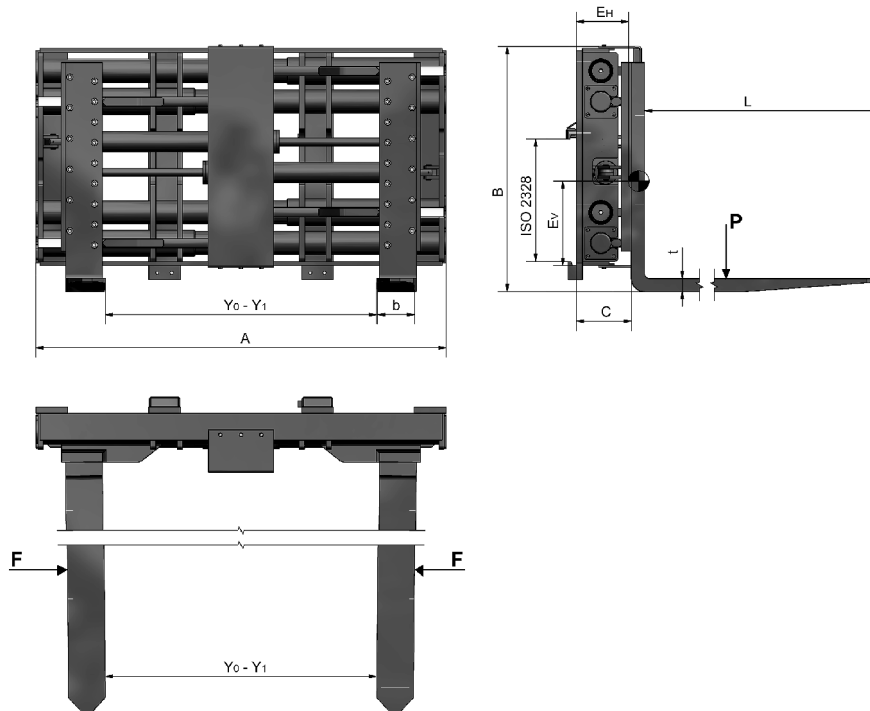

	P	a	A	B	B ₁	C	D	E _H	E _V	F	Q	b x t x L	Y ₀ - Y ₁	ISO	F
	[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]		[mm]	2328	[N]
HK 1810			1000				600	228			360		250-1200		
HK 1811	1800	500	1100	642	582	165	640	222	370	120	373	120x40x1200	250-1300	2	17500
HK 1813			1300				740	214			399		250-1500		
HK 2511			1100				680	231			489		250-1300		
HK 2513	2500	500	1300	712	670	185	790	222	368	125	522	125x50x1200	250-1500	2-3	29600
HK 2515			1500				880	214			556		250-1700		
HK 4013			1300				790	236			736		250-1500		
HK 4015	4000	500	1500	832	790	225	890	235	428	150	749	150x50x1200	250-1700	3	36200
HK 6015	6000	600	1500	932	890	240	890	261	478	150	893	150x60x1200	350-1700	4	36200

Max. Betriebsdruck 140 [bar].
E_H, E_V und Q für Gabellänge 1200 [mm].

