


Push aggregat for gaffelmontering type HPG3

Fordele

- nem montering med hurtigskift
- udsparring i frontplade giver god sigt
- brede gaffellommer sikrer god understøtning af pallegodset
- enkel og stabil konstruktion



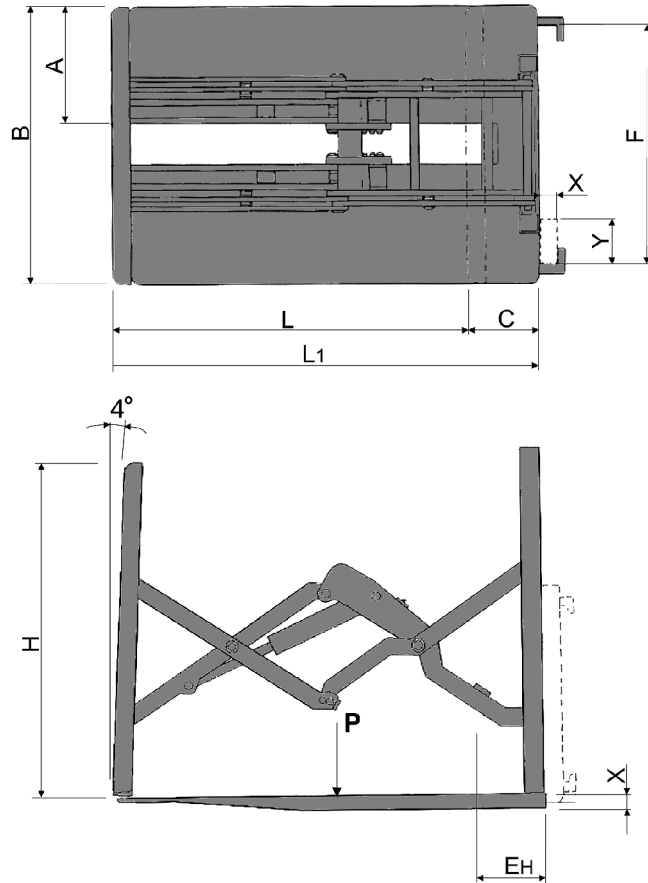

| | P | a | A | B | C | F | H | L* | L ₁ | E _H | X x Y | Q |
|---------|------|------|------|------|------|------|------|------|----------------|----------------|----------|------|
| | [kg] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [kg] |
| HPG3-12 | 1500 | 600 | 400 | 1000 | 165 | 800 | 900 | 1200 | 1365 | 270 | 60 x 150 | 327 |

Max. arbejdstryk 175 [bar].
*Push længde = L + 15 [mm].
Hydraulik: 1 funktion.

