



### **e-l-m Switch control knob**

#### **For installation on the operating handle of the truck**


With the installation of the Switch control knob you have the possibility to control two hydraulic functions from one operating handle. On the side of the control knob there is a switch, which when activated switches between these two functions. On the handle, there is also a diode indicator showing which function is on.





**The set consists of:**

- 1 control knob
- 3 [m] wire
- 1 axle  $\varnothing 30 \times 60$  [mm]
- 1 spring pin  $\varnothing 5 \times 30$  [mm]

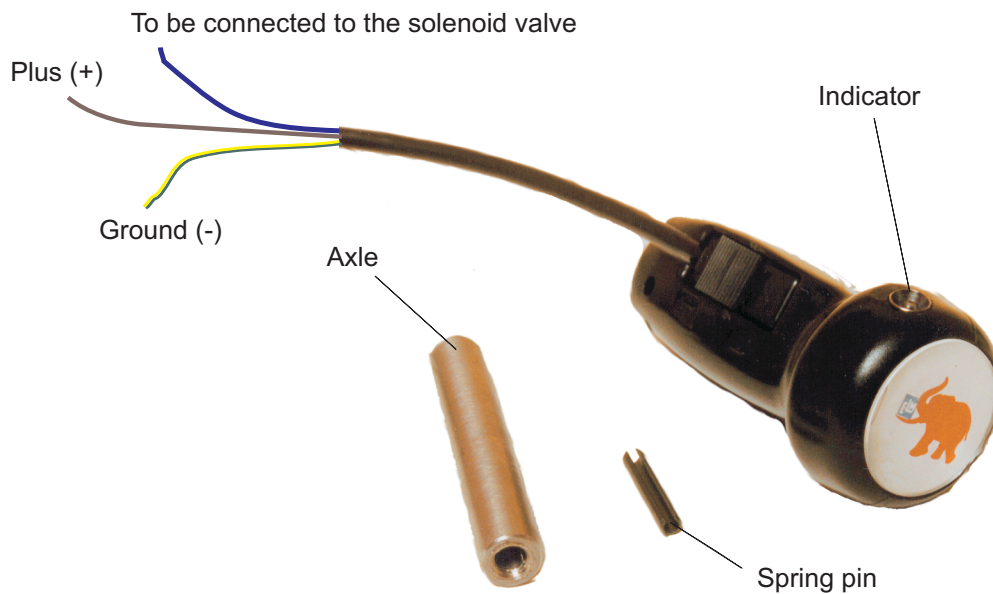

The Switch control knob must be mounted on the operating handle of the truck, either by welding or by cutting a thread at the end of the axle. Then you lock the control knob with the spring pin and connect the wires as showed on the illustration.

