




## **Roll clamp, type RERK-F and RERK-B**

### **Advantages**

- Designed to transport and turn paper rolls and other round goods
- Continuous rotation 360°
- The roll arms are covered with high friction material
- Incorporated pressure regulator
- RERK-F with fixed underarm and movable upper arm
- RERK-B with both movable arms



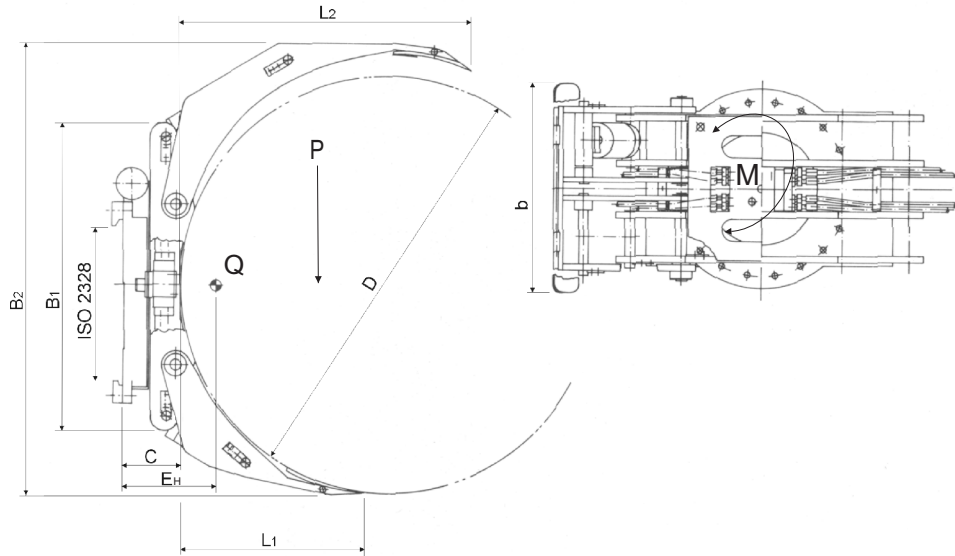

	P [kg]	B <sub>1</sub> [mm]	B <sub>2</sub> [mm]	C [mm]	E <sub>H</sub> [mm]	L <sub>1</sub> [mm]	L <sub>2</sub> [mm]	m [mm]	b [mm]	Q [kg]	D [mm]	ISO 2328	M [Nm]/140 [bar]
RERK 3610 F-12	1000	960	1310	180	267	515	875	200	600	410	380-1250	2	4360
RERK 3610 B-12	1000	960	1310	180	267	515	875	200	600	410	300-1200	2	4360
RERK 3620 F-13	2000	960	1410	180	260	570	950	250	650	595	450-1300	2-3	9600
RERK 3620 F-15	2000	1255	1640	225	275	635	1060	250	650	720	600-1500	2-3	9600
RERK 3620 B-13	2000	960	1410	180	260	570	950	250	650	595	300-1300	2-3	9600
RERK 3620 B-15	2000	1255	1640	225	275	635	1060	250	650	720	400-1500	2-3	9600
RERK 3630 F-13	3000	960	1410	250	285	570	950	300	800	810	700-1300	3	14120
RERK 3630 F-15	3000	1255	1640	250	295	660	1085	300	800	1045	430-1500	3	14120
RERK 3630 F-18	3000	1610	1940	250	305	785	1310	300	800	1175	1000-1800	3	14120
RERK 3630 B-13	3000	960	1410	250	285	570	950	300	800	810	300-1300	3	14120
RERK 3630 B-15	3000	1255	1640	250	295	660	1085	300	800	1045	275-1500	3	14120
RERK 3630 B-18	3000	1610	1940	250	305	785	1310	300	800	1175	500-1800	3	14120
RERK 3635 F-15	3500	1255	1640	250	305	660	1085	300	900	1250	500-1500	4	16400
RERK 3630 F-16	3500	1435	1820	250	310	745	1250	300	900	1185	900-1600	4	16400
RERK 3635 F-18	3500	1610	1940	250	320	785	1310	300	900	1350	1000-1800	4	16400
RERK 3635 B-15	3500	1255	1640	250	305	660	1085	300	900	1250	500-1500	4	16400
RERK 3630 B-16	3500	1435	1820	250	310	745	1250	300	900	1185	450-1600	4	16400
RERK 3635 B-18	3500	1610	1940	250	320	785	1310	300	900	1350	500-1800	4	16400

Max. working pressure for the rotation 210 bar (RERK 3610 175 bar).

Max. working pressure for the clamping 140 bar.

