



Teleskopgabeln, Typ TFS (Slim-line)

Vorteile

- einsparung von Lagerraum, Zeit und Geld
- optimale Freisicht
- extra dünn
- Integrierter Gleichlauf, *ohne externes Ventil*
- Einfache Montage
- Wartungsfreundliche Konstruktion

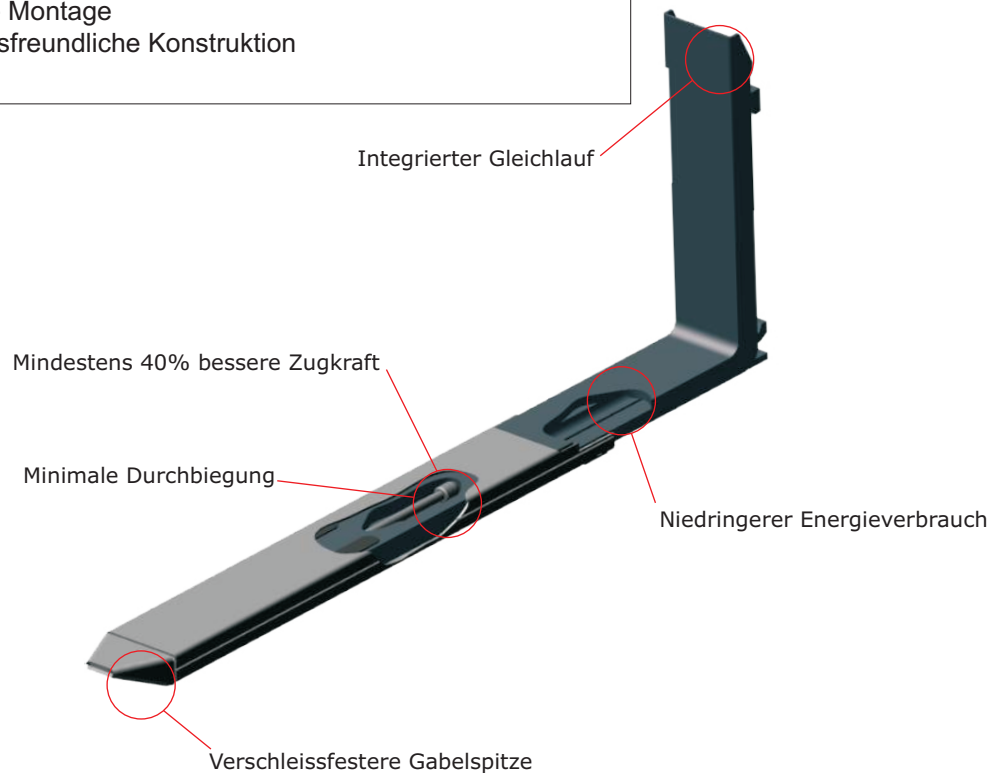

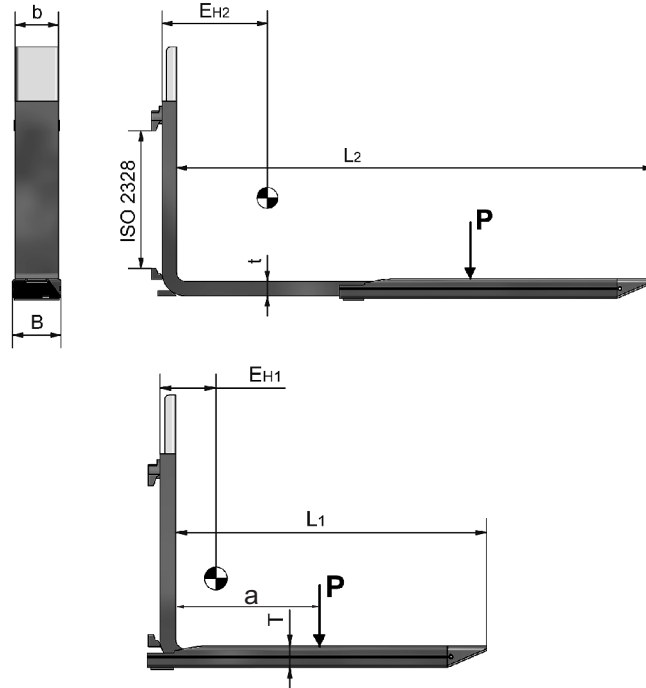

	P [kg]	a [mm]	L ₁ /L ₂ [mm]	E _{H1} /E _{H2} [mm]	E _V [mm]	B x T [mm]	b x t [mm]	Q [kg]	ISO 2328
2TFS-25-1150/1900	2500	500	1150/1900	402/585	32	137x52	125x40	152	2A
2TFS-25-1250/2100			1250/2100	448/660	28			162	
2TFS-25-1350/2300			1350/2300	494/735	24			172	
2TFS-25-1400/2400			1400/2400	517/773	22			177	
2TFS-35-1150/1900	3500	500	1150/1900	382/546	65	166x52	150x40	194	3A
2TFS-35-1250/2100			1250/2100	427/617	58			206	
2TFS-35-1350/2300			1350/2300	472/689	52			217	
2TFS-35-1400/2400			1400/2400	495/726	50			223	

Min. Betriebsdruck 150 [bar].
Max. Betriebsdruck 175 [bar].

